



SE-2434/S

REF SE2434SNR29

This SE-2434/S battery is rechargeable lithium-ion, engineered and designed for use in a world wide tactical environment, and is manufactured to meet and exceed Indian military standard JSS-55555 and ISO-9000 methods and procedures. This battery meets the requirements of JSS 6140-03 : 2013 and MIL-PRF-32052 with reference to MIL-STD-810E and MIL-STD-461.

Benefits

- Wide operating temperature range
- Durable high impact ABS case, UL94V-0
- High energy density cells
- Built in protection circuitry

Key Features

- 28V output voltage
- Battery Communication (optional)
- MIL-PRF-32052 compliance
- High power battery, 328Wh
- Robust molded plastic case
- Enables remote battery shutdown

Typical Applications

- Rugged, portable electronics
- Robotics /AUVs / UUVs
- Military communication device
- Surveillance equipment
- Remote control electronics
- Night vision devices



Rechargeable Li-ion Battery 28.8V 11.4Ah, 328Wh

Compliance

- JSS-55555
- JSS-6140-03 : 2013
- MIL-STD-810E
- MIL-STD-32052

Approvals

- ISO 9001:2015
- ISO 13485:2016
- Safety Datasheet
- UL-1642 (cells)

Technical Specification:-

National Stock Number	PENDING
Part Number	SE-2434/S
Pack Designation	8INR19/65-4
Capacity (typ.)	11.4 AH
Nom. Voltage	28.8 Volt
Max. Voltage	33.6 Volt
Max. Discharge Current (cont.)	10.0 A
Max. Discharge Current (pulse)	15.0 A for 10 sec.
Replacement to	ELI-2434S
Visual state of charge indicator	None
Life Cycle	1000 cycles at 25°C
Communication	None
Recommended charge	Constant current at C/3, 2.85A with 33.6V limit, End with timer or when current drops below 0.1A
Physical Characteristics	
Dimensions (L x W x H)	187.5 x 73 x 79 mm ± 0.5 mm
Weight	1.80 Kg ± 0.05Kg
Weight energy density	182 Wh/Kg
Construction & Layout	DRW-1144
Connector	Floating type 3.05mm
Battery Housing	ABS Plastic UL94V-0
Color	Olive drab / Black

Manufactured by : **SEALED ENERGY SYSTEMS**



Plot No. 72, HSIIDC Industrial Estate,
Ambala Cantt -133006, Haryana, India



+91 171 2699 054
+91 171 2698 389




+91 171 2698 054
+91 171 2699 221




Rechargeable Li-ion Battery 28.8V 11.4Ah, 328.32Wh


Rate discharge curve@ 25°C

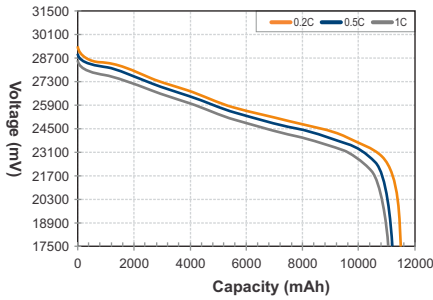

Discharge curve at different temperatures

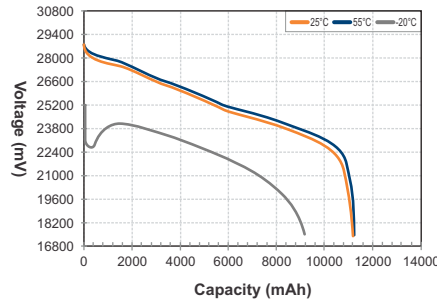

Rate charge curve@ 25°C

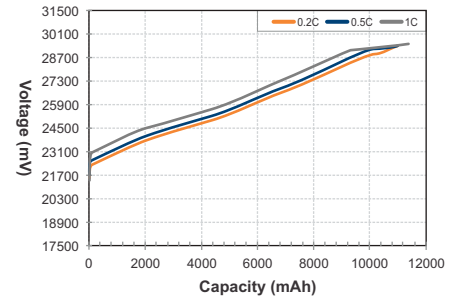

Protection

- Over current / short circuit
- Over charge / over discharge
- Over heating
- Charging at over temperature range
- Reverse polarity

Smart Functions

- Cell balancing

Operating Temperature

- Charge -20°C to +55°C
- Discharge -20°C to +55°C
- Storage -20°C to +55°C
- Humidity at 0 to 95%

Storage

- Allowable: -20 to +55°C
- Recommended: +20 to +40°C
- Humidity at 0 to 95%


Transportation

- UN 38.3 Miscellaneous Class 9


Further Information

Please refer to our website www.sesbatteries.co for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc.


Cycle life curve@ 25°C

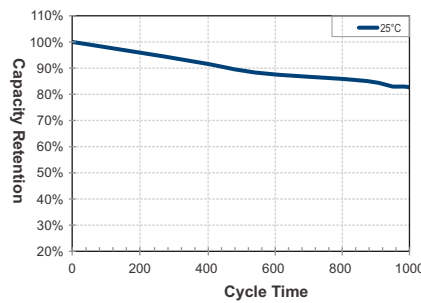

High temperature cycle life curves

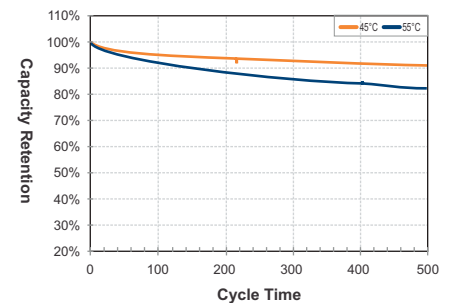

Product Dimension

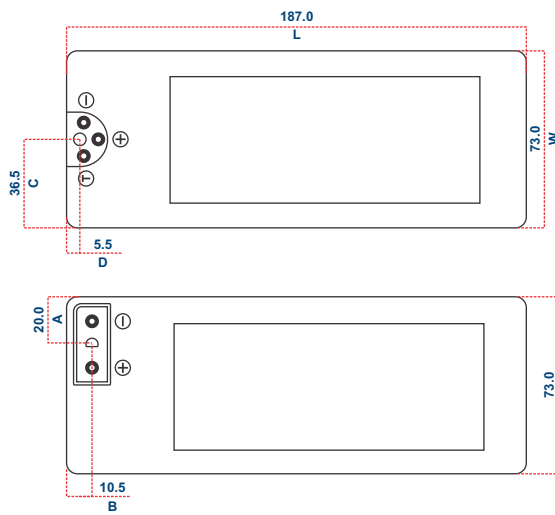

Dimensions are in Millimeters	
Tolerances: ±0.5mm	
L : 187.0	W : 73.0
H : 78.0	A : 20.0
B : 10.5	C : 36.5
D : 5.5	

